






**SIDESHIFT
BACKHOE**



TECHNICAL SPECIFICATION

Model		P 250	P 280	P 320	
Max digging depth	mm	2450	2800	3250	
Oil flow, min-max	lt/min	20 - 30	35 - 45	40 - 50	
Rated oil pressure	bar	160	165		
Weight standard configuration	kg	540	640	820	
Standard bucket width	mm	300			
Breakout force at bucket tooth	kg	1850	2500	3100	
Standard frame width	mm	1300	1500	1600	
Total swing		180°			
Control valvebank sections	n.	6			
Slewing hydraulic lock		standard			
A	mm	195°			
B	mm	3080	3620	3920	
C	mm	420		470	
D	mm	1460	1620	1780	
E	mm	2450	2800	3200	
F	mm	2150	2400	2550	
	ton	1,7 - 2,2	2,2 - 3,4	3,4 - 4,8	
Overall size in standard configuration		A cm	160	165	180
		B cm	190	220	230
		C cm	80	90	100

Working dimensions

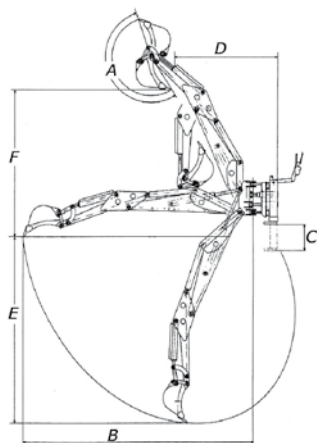

On request:

auxiliary line for hydraulic breaker.



G.F. Gordini srl

Via E. Mattei, 4 - 48012 Bagnacavallo RA - Italy
tel. +39 0545 62712 fax +39 0545 62140
info@gfgordini.com - www.gfgordini.com

ACCESSORI PER MACCHINE OPERATRICI

Data, descriptions and images of this document are not binding hence GF Gordini reserves the right to alter part or all of them at any time with no notice.